


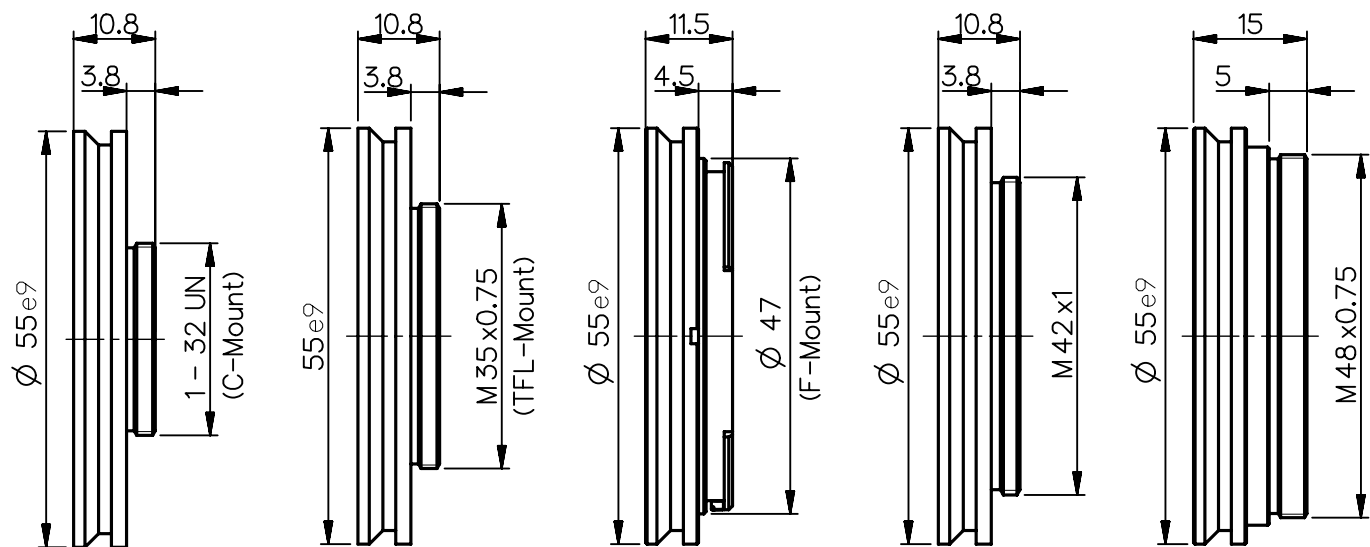

2408-009-106-00

C CA 0.8

2408-009-174-00

TFL CA 0.8

2408-009-142-00


F CA 0.8

2408-009-119-00

M42x1 CA 0.8


2408-009-148-00

M48x0.75 CA 0.8

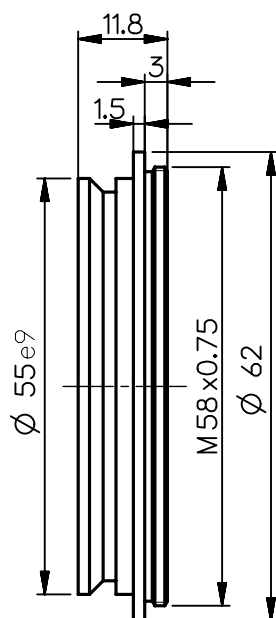


2408-009-132-00

M58 CA 2.6

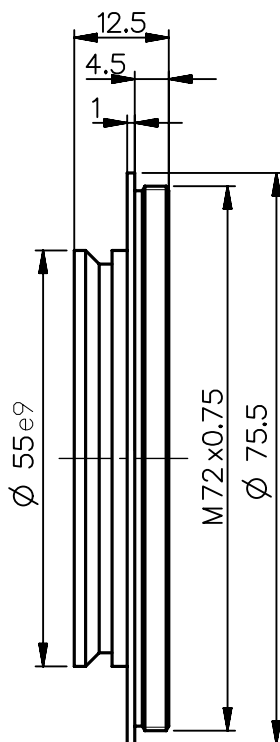


2408-009-134-00

M72 CA 1.8

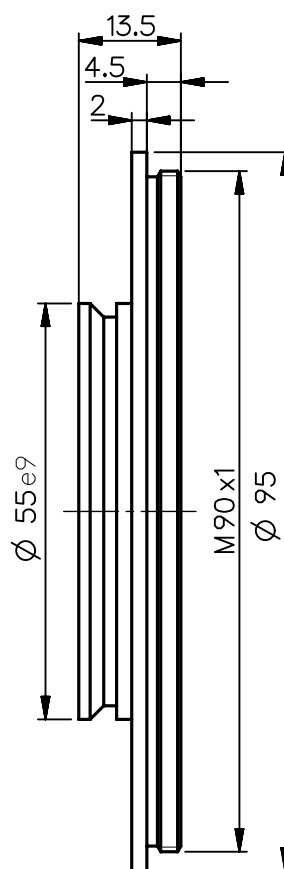

2408-009-166-00

M90 CA 2.8

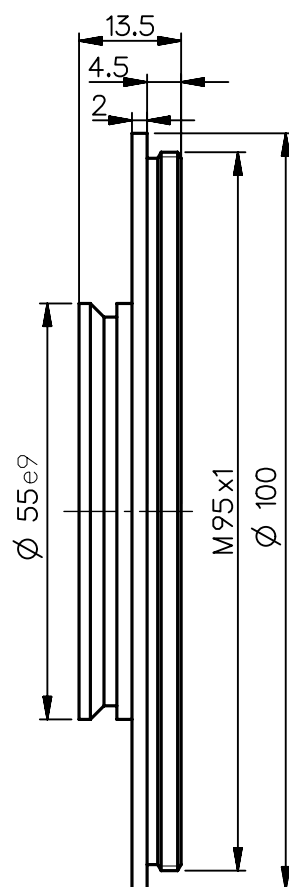

2408-009-155-00

M95 CA 2.8

NX	EU-D		AL-T1A		US-D			US-ML		not export controlled					
								PDM-Status Freigabe		-					
Schutzvermerk "DIN ISO 16016" beachten	Rev.	Aenderung	Datum	Freigabe	zul. Abweichung für Mass, Form & Lage ISO 2768-mH		Oberfläche black, anodised	Maßstab 1:1							
	a	Neuausg						Werkstoff							
	b	10-132	02.11.10	Labarte											
	c	12-0185	12.04.12	Schuber											
	d	14-0184	21.10.14	Schiffe	Tolerierung ISO 8015			Benennung Camera adapter							
	e	15-0737	14.09.15	Boll											
	f	16-0620	29.09.16	Boll	Erster-	Datum	Name								
	g	20-0407	27.04.20	Denk	stellung	29.04.09	Labarte								
					Prüfung	29.04.09	Schaeffler								
								Zeichnungsnummer		Blatt					
				2408-009-100-41-0002g				von							
DIN A 4	Alle Maße in mm, inklusive Oberflächenbehandlung					Ersatz für									